




# XAG Charger Connector Upgrade Kit (2024 Battery Cooling Tower)

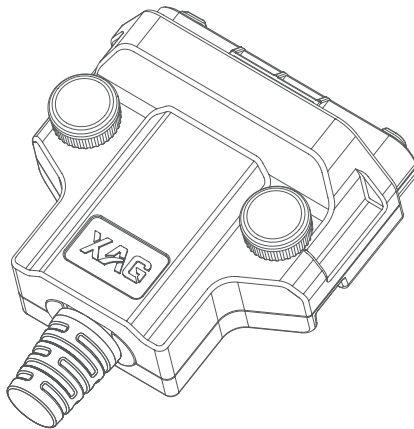


# Disassembly



- ① Unscrew the four set screws securing the old charger connector (2023);




- ② Remove the lower shell;




- ③ Remove the upper shell and detach the two set screws of cable.


# Installation

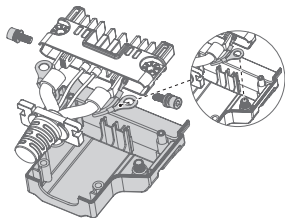

- ① Secure the cooling tower cable with M4 screws from the upgrade kit and connect the OT terminals to the copper studs on the upper shell;



- ② Secure the wave washer with nuts and tighten the screws through the upper shell;



- ③ Install the lower shell of the new charger connector (2024 Battery Cooling Tower) and secure the upper and lower shells with four screws.



⚠ Do not change the position of the main power cables. Ensure the red cable is on the left and the black cable is on the right.